

LEDEXPRESS+

UVLED Lamp

MANUAL GUIDE

PLEASE READ ALL THE SAFETY INSTRUCTIONS BEFORE THE DEVICE OPERATION.
KEEP THIS MANUAL GUIDE SAFE FOR FUTURE REFERENCE.

PRODUCT INTRODUCTION


The **LEDEXPRESS+** UVLED Lamp is used for the UV- and UVLED light setting artificial nail substances consolidation. Whit is dual light emitting the device can cure most of the nail materials successfully. The **LEDEXPRESS+** UVLED Lamp has an easy control system, and a lightweight small design with high performance what makes it suitable for travelling and hand/feet use as well. The device is provided with Motion sensor- and Timer switch button control and 18pcs large performance LED bulbs for the high quality professional work.

SPECIFICATION:

UV Classification: UV Type 1 [365+405nm]
Input: AC100-240V, 50/60Hz, 0.5A
Output: DC24V, max.0.65A
Power: max.36W±10%
Measures: 210*120*80mm
Weight: 217.75g±10%

ACCESSORIES:

AC Adapter

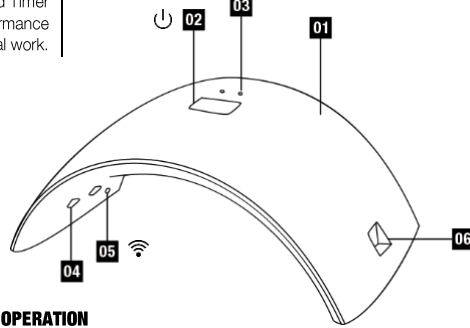

OPERATION

PARTS OF THE LEDEXPRESS+ UVLED LAMP:

- [01.] LEDEXPRESS+ UVLED Lamp
- [02.] Control button and Timer [30sec, 60sec] ⏻
- [03.] Indicator light.
- [04.] LED bulbs [18pcs]
- [05.] Motion sensor switcher and Timer [100sec] 📶
- [06.] AC Adapter socket

ATTENTION! Before the device operation, always check the device and its accessories just state. Pay attention to do not touch the device LED bulbs with anything during in use. [e.g.: skin, nails- or other professional items/accessories/materials].

- [1.] Unpack the device and its accessories from the packaging then select a stable-, horizontal-, even surfaced place for the device use.
- [2.] Connect the device AC Adapter to the outlet, than into the device AC Adapter socket [see at pic.06.].
- [3.] The LEDEXPRESS+ UVLED Lamp operation and timed use.

[3.1.] Control button function [see at pic.02.]: ⏻

With the Control button use the device will run on 30sec and 60sec timed use. During the function operation the Motion sensor function will not work [see more at the [3.2.] chapter]. Press the Control button on the device top [see at pic.02.]. With one press the device will run on 30sec [30S], with two press the device will run on 60sec[60S] timed use. The adjusted operation time will be indicated by the device Indicator lights on the device top [see at pic.03.]. With the Control button third press the device will automatically shut down [see at pic.02.]. For the device restart, press again the Control button on the device top [see at pic.02.], than set the desired operation time. **Notice:** At the end of the operation time, the device will automatically shut down without a sound indication.

Switch between the operation functions:

- A.** Wait for the operation time end, than operate the device according to the [3.2.] chapter.
- B.** Turn off the device with the Control button on the device top [see more above in the [3.1.] chapter], than operate the device according to the [3.2.] chapter.

[3.2.] Motion sensor function [see at pic.05.]: 📶

With the Motion sensor use the device will run on100sec [1min40sec] timed use. To start the operation, place the hand- or the feet in the Motion sensors range [see at pic.05.]. Due to the movement the device will automatically turn on. Without customer use, place in an at least 1-1.5cm [0.39-0.59in] high, non-transparent item in front of the Motion sensors and let it still [see at pic.05.]. The device will be automatically turn on by the movement. **Notice:** At the end of the operation time, the device will automatically shut down without a sound indication. For the device stop during in operation, remove the hand/feet or item form the Motion sensors range [see at pic.05.]. To restart the operation place in again the hand/feet or item to Motion sensors range [see at pic.05.]. After every stop/restart the device will automatically run on100sec [1min40sec] again.

Switch between the operation functions:

Press the Control button on the device top [see at pic. 02.], than operate the device according to the [3.1.] chapter.

- [4.] After the device use is finished, turn off the device according to the [3.1.] and [3.2.] chapters, than remove the AC Adapter from the device AC Adapter socket [see at pic. 06.], than from the outlet as well.

Attention! If the applied material causes burning sensation on the nails [it depends on the material and the person sensitivity] than use the device with breaks or temporary discontinue the device use.

CLEANING/MAINTENANCE

ATTENTION! Do not disassemble the device! The device do not require inner cleaning/maintenance! Before the cleaning/maintenance always make sure the device annealed state [see at OPERATION [4.] chapter]. Only proceed with the cleaning/maintenance after the device- and the LED bulbs full cool down! It is recommended to wear gloves during in the procedure.

Tools for the cleaning/maintenance: compressed air, brush and a non-synthetic soft, clean dry cloth.

Place the device into a stable, even surfaced place [it is recommended to put a soft cloth under the device]. Wipe out the external- and inner surface with the soft, dry cloth. Turn the device upside down, than clean the inner plastic panel, the settings and the hard to reach part with brush and compressed air [see at the pic [04.] - [05.]]. Wipe out again the inner panel with the soft, dry cloth. Turn back the device to its original position than clean the device external surface and the hard to reach parts with brush and compressed air [see at the pic [02.] [03.] and [06.]].

For the last step wipe out the external panel with the soft, dry cloth, than check the device proper operation [see at the OPERATION [1.] - [3.] chapters.

Notice! In case of tenacious contamination, the device external panel can be cleaned with soft, moist cloth, but pay attention, liquids cannot be contacted with the device inner parts or switchers, joints, openings, settings or can be contacted with the device LED bulbs or its AC Adapter socket [see at the pic [02.] - [06.]]. At first place the cleaning material into the cloth, than start the surface cleaning. After the moist cleaning, do not put the device under in charge for at least 1-2min and always wait for its full dry. Do not use solvent detergents!

In case of average frequency use, clean the device- and its accessories according to the described above at least once a week. If it requires look for the place of purchase and ask for professional help.

STORAGE

Store the device and its accessories always in a dry place, far from radiant heat in a clean state.
Wind the AC Adapter cord loosely together while pay attention not to break it.

Before the device operation always check the device and its accessories just state.

SAFETY CAUTIONS

- [1.] The device and its accessories are only for indoor use, between 0--40°C [32--104°F].
- [2.] The device cannot be used by individuals under age 18.
- [3.] Before the device operation always check the device and its accessories just state.
- [4.] Do not ever operate the device if any parts of it damaged or had any kind of accident or fell into water! Take the device into the place of purchase for repair and seek for professional help.
- [5.] In case of the time switcher is damaged, stop the device use than take it to the place of purchase [see at pic.02. and 05.].
- [6.] Only authorized personals can repair the device- or its accessories.
- [7.] The device or its accessories cannot become contact with liquids.
- [8.] Do not ever touch the device- or its accessories with wet/moist hands, even if the device is turned off or in annealed state.
- [9.] Use/store the device only in dry places far from radiant heat, in a clean environment. Avoid moist/wet and contaminated places.
- [10.] Use/store the device only in stable, even surfaced places. Do not put the device into places where it can be knocked down or may fall off or unauthorized persons can reach it.
- [11.] The device cannot be left without supervision when it is turned on, and children's cannot be present during the device operation.
- [12.] Some drugs- and cosmetics can increase the sensitivity to the UV radiation. Before the device use remove all cosmetics from the skin surface and make sure to do not take- or use any product or medication what can cause- or increase the UV radiation sensitivity.
- [13.] Do not use the device on individuals whom has highly sensitive skin- or has freckle tendencies or suffered from skin cancer before.
- [14.] Do not ever look directly into the device light source during in operation [see at pic.04.], as well as do not let the skin to be exposed excessive amount UV radiation. Otherwise it may cause eye- or skin damage or can suffer premature skin ageing.
- [15.] Do not touch the device LED bulbs with anything [see at pic.04.], e.g.: skin, nails or other professional items/accessories/materials or water/cleaning supplies. Otherwise the LED bulbs [see at pic.04.] may suffer damage and can cause decline to their performance what will reduce the device lifetime.
- [16.] The device and its accessories may have electric charges in them even when they turned off. After the device use is finished, always anneal it according to the OPERATION [4.] chapter.

For more information about the device visit our website: <http://www.crystalnails.com> or look for the place of purchase.

NOTICE!

If any case of malfunction was found or any parts of the device has to be replaced/repared, please look for the place of purchase.

ELITE COSMETIX LTD.; Jozsef Krt. 44., H-1085 Budapest, Hungary

[EN] LEDEXPRESS+ UVLED LAMP [HU] LEDEXPRESS+ UVLED LÁMPA [RO] LAMPĂ UVLED LEDEXPRESS+ [DE] LEDEXPRESS+ UVLED LAMPE [FR] LAMPE UVLED LEDEXPRESS+ [IT] LAMPADA UVLED LEDEXPRESS+ [ES] LAMPARA UVLED LEDEXPRESS+